E024U | 24V Control Board for Swing Gate Operator

The New E024U Control Board is designed to be used with the following FAAC Swing Gate Operators:

S418 Electro-mechanical Operator


S450H Hydraulic Operator

S800H Hydraulic in Ground Operator

390 Electro-mechanical Operator

415 Electro-mechanial Operator

770 Electro-mechanical in Ground Operator

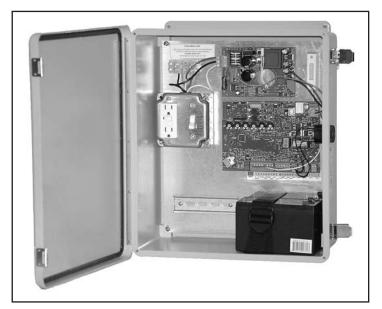

E024U

Features

- . UL991 safety standard compliant
- . Powerful and efficient Switching Power Supply
- . Easy programming with trimmers and dip switches
- . One pushbutton automatic self learning
- . Self resetting fuses
- . Stand by mode for efficient power use
- . Built in battery backup
- . Leaf opening mode selectable: with or without leaf delay.



Technical Specifications	
AC input ratings:	115V - 60Hz
Input Power	400W Max - 4W Stand By
Motor Output Current	7A each
Accessory Power	24 Vdc 0 500 mA
Operating Temperature	-4°F to131°F (-20°C to 55°C)