



J355HA M30-P1

New automatic high security & antiterrorist bollard
ASTM certified

FAAC
Simply automatic.

J355HA M30-P1

RISING TO THE CHALLENGE OF PERIMETER SECURITY



J355HA M30-P1 is the new FAAC retractable bollard conceived for **perimeter security applications**.

This product has been specifically designed for the protection of sensitive areas such as: airports, embassies, consulates, public offices, banks, marina, etc.

It has been tested in accordance to “**ASTM F 2656-07** – American Standard Test Method for Vehicle Crash Testing of Perimeter Barriers” and successfully ranked with the **highest class (P1)**

J355HA M30-P1 Bollard can therefore arrest a 6800 Kg truck running at a speed of about 50 Km/hour (30 Mph) in less than 1m (P1)!

To further enhance the level of protection offered, is available also an EFO (Emergency Fast Operation) special version. The rising speed is ~1,5 sec in J355 M30-P1 EFO versions.



J355HA M30-P1 IS THE FAAC SOLUTION FOR THE INCREASING DEMAND OF SECURITY

- Allows the access to sensitive areas to authorized vehicles only
- Allows free pedestrian flow, preventing at the same time vehicle intrusion

Advantages:

- Reduces the aesthetical impact on the surrounding context, thanks to its mobile concealed element
- Optimizes the use of human resources in access control activities
- Guarantees a safe movement, thanks to built-in LED lights
- Customizable on-demand color, to match with the urban architecture



INNOVATIVE SECURITY BOLLARD

J355HA M30-P1 bollard has a number of exceptional features.

- Tested in accordance to ASTM F 2656-07 M30 standards, getting the best “penetration rating” (P1).
- All in one concept: bollard has a built-in hydraulic drive unit.
- Emergency Fast Operation circuit -option- for rapid movement (1,5) .
- Upraised position kept by hydraulic blocking, even in case of power failure.
- 16mm steel cylinder, treated with cataphoresis and painted- satin stainless steel version available.
- No pipes with oil under pressure on underground ducts to avoid leakages or failure risks.
- Remarkable duty cycle.
- Central rail piston to provide optimal stability of the cylinder when rising and lowering.
- Built-in LED lights grant good visibility in all directions.
- Junction boxes and connectors are IP 66 ranked.
- Stainless steel internal fixing frames.
- Extremely reliable electronic control unit -JE275-.
- No customized cables requested.



Accessories for automatic version

- Pit heater JH355
- Control unit for one bollard management JE275

Options for automatic version

- RAL painting on request (not available on stainless steel satin finishing)
- Stainless steel satin finishing
- E.F.O. Emergency Fast Operation for faster bollard uprising



TECHNICAL SPECIFICATIONS

Drive	Hydraulic unit
Rising time	~ 6,0 sec
Rising time with E.F.O.	~ 1,5 sec
Descent time	~ 2,0 sec
Power supply	230 Vac -10% / + 6%; 50 (60)Hz
Max power consumption	1.200 W
Max expressed force	5.000N
Suggested Duty Cycle	Frequent Usage
Cylinder stroke	1000 mm
Cylinder diameter	355 mm
Cylinder steel sheet thickness	16 mm
Cylinder material	S355JR EN10210
Cylinder surface (Painted steel version)	Cataphoresis and polyester powder painted
Standard color	Dark grey metallized RAL 7021
Cylinder surface (Satin stainless steel version)	AISI 316
Head surface treatment	Anticorrosive case aluminum RAL 9006
Reflective strip standard height	55 mm
Impact resistance	150 kJ
Break in resistance	656 kJ
Tested and Certified	In accordance with ASTM F2656-07 - M30-P1
Frame load class	25 Tons (C25)
Supply Cable	16+1 conductors –min. section 1,5mm
Max cable length	50 mt
Junction box protection class	IP66
Operating temperature	-15 °C / +55 °C
Operating temperature with heater	-40 °C / +55 °C
Weight	490 Kg (bollard) + 250 Kg (pit)



PIT (INCLUDED)

Dimensions	L569 x D569 x H1500 mm
Material	Steel sheet alloy, thickness 2mm (+frame to be walled in)
Main frame	Ductile casted iron GS400, treated with cataphoresis



Airports



Banks



Embassies



Military areas

AVAILABLE VERSIONS

Model	Finish	Item Code
HA (AUTOM.) SECURITY BOLLARD J355/H1.000	painted steel	116002
HA (AUTOM.) SECURITY BOLLARD J355/H1.000 EFO	painted steel	116003

Pit included

AVAILABLE VERSIONS


Model	Finish	Item Code
HA (AUTOM.) SECURITY BOLLARD J355/H1.000	inox stainless steel	116032
HA (AUTOM.) SECURITY BOLLARD J355/H1.000 EFO	inox stainless steel	116033

Pit included

ACCESSORIES

Model	Item Code
BOLLARD CONTROL UNIT JE275 1 unit can manage 1 J355HA M30-P1 bollard	116300
PIT HEATER (OPTIONAL)	116202

INSTALLATION LAYOUT

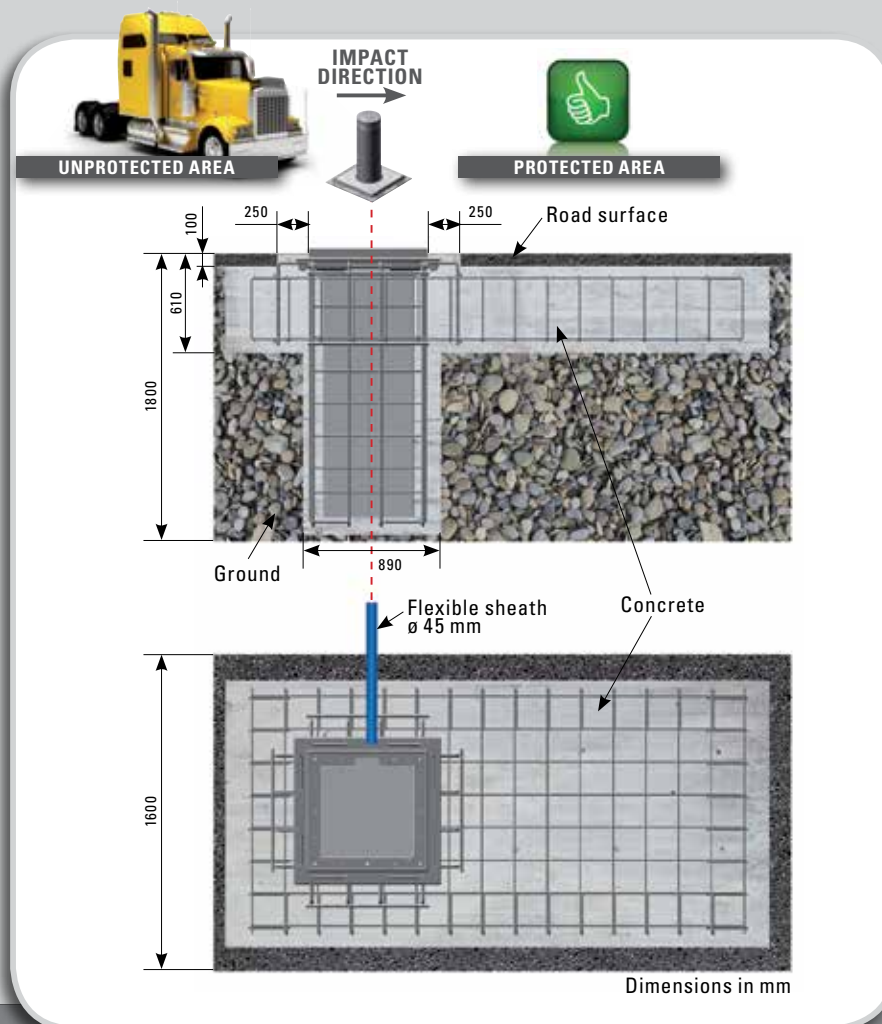

NOTE:

1. The foundation concrete can be poured directly into the dug-out area.
2. Concrete specifications:
 - A. Class C25/30
 - B. Concrete with 10-30 aggregate according to UNI EN 12620 standard
 - C. The bollard must be installed after at least 7 days of concrete setting.
3. The compacting index of the surrounding ground must be at least 90% of the "Proctor" optimum curve, according to UNI EN 13286-2:2005 standard.
4. The steel framework must comply with class B450C (ASTM A615 Grade 60).

HEADQUARTERS**ITALY**

FAAC SpA
Via Calari 10 - 40069 Zola Predosa (BO)
Tel. +39 051 61724 - Fax +39 051 758518
it.info@faacgroup.com - www.faacgroup.com

SUBSIDIARIES**AUSTRALIA**

FAAC AUSTRALIA PTY LTD
Homebush – Sydney, Australia
tel. +61 2 87565644
fax +61 2 87565677
www.faac.com.au

AUSTRIA

FAAC GMBH
Salzburg, Austria
tel. +43 662 8533950
fax +43 662 85339525
www.faac.at

FAAC TUBULAR MOTORS

tel. +49 30 56796645
fax +49 30 22409006
faactm.info@faacgroup.com
www.faac-tubularmotors.com

BENELUX

FAAC BENELUX NV/SA
Brugge, Belgium
tel. +32 50 320202
fax +32 50 320242
www.faacbenelux.com

FAAC TUBULAR MOTORS

Schaapweg 30
NL-6063 BA Vlodrop, Netherlands
tel. +31 475 406014
fax +31 475 406018
faactm.info@faacgroup.com
www.faac-tubularmotors.com

CHINA

FAAC SHANGHAI
Shanghai, China
tel. +86 21 68182970
fax +86 21 68182968
www.faacgroup.cn

FRANCE

FAAC FRANCE
Saint Priest - Lyon, France
tel. +33 4 72218700
fax +33 4 72218701
www.faac.fr

FAAC FRANCE - AGENCE PARIS

Massy - Paris, France
tel. +33 1 69191620
fax +33 1 69191621
www.faac.fr

FAAC FRANCE - DEPARTEMENT VOLETS

Saint Denis de Pile - Bordeaux, France
tel. +33 5 57551890
fax +33 5 57742970
www.faac.fr

GERMANY

FAAC GMBH
Freilassing, Germany
tel. +49 8654 49810
fax +49 8654 498125
www.faac.de

FAAC TUBULAR MOTORS

tel. +49 30 56796645
fax +49 30 22409006
faactm.info@faacgroup.com
www.faac-tubularmotors.com

INDIA

FAAC INDIA PVT. LTD
Noida – Delhi, India
tel. +91 120 3934100/4199
fax +91 120 4212132
www.faacindia.com

IRELAND

NATIONAL AUTOMATION LTD
Co. Roscommon, Ireland
tel. +353 71 9663893
fax: +353 71 9663890
www.nal.ie

MIDDLE EAST

FAAC MIDDLE EAST FZE
Dubai Silicon Oasis Operation Center - Dubai, UAE
tel. + 971 4 3724190
fax+ 971 4 3724191
www.faac.ae

NETHERLANDS

KEMKO BV
Doetinchem, Netherlands
tel. +31 314 378777
fax +31 314 362224
www.kemko.nl

NORDIC REGIONS

FAAC NORDIC AB
Perstorp, Sweden
tel. +46 435 779500
fax +46 435 779529
www.faac.se

POLAND

FAAC POLSKA SP.ZO.O
Warszawa, Poland
tel. +48 22 8141422
fax +48 22 8142024
www.faac.pl

RUSSIA

FAAC RUSSIA
Moscow, Russia
tel. +7 (495) 646 24 29
www.faac.ru

SPAIN

CLEM, S.A.U.
San Sebastián de los Reyes - Madrid, Spain
tel. +34 91 3581110
fax +34 91 7293309
www.faac.es

SWITZERLAND

FAAC AG
Altdorf, Switzerland
tel. +41 41 8713440
fax + 41 41 8713484
www.faac.ch

TURKEY

FAAC OTOMAT K GEÇ S STEMLER
SAN. VE T.C. LTD. SIRTEKI
İstanbul, Turkey
tel. +90 (0)212 - 3431311
www.faac.com.tr

UNITED KINGDOM

FAAC UK LTD.
Basingstoke Hampshire, UK
tel. +44 1256 318100
fax +44 1256 318101
www.faac.co.uk

U.S.A.

FAAC INTERNATIONAL INC
Rockledge, FL - U.S.A.
tel. +1 866 925 3222
fax +1 904 448 8958
www.faacusa.com

FAAC INTERNATIONAL INC
Fullerton, California - U.S.A.
tel. +1 714 446 9800
fax +1 714 446 9898
www.faacusa.com

