




# FAAC JS 80 F SECURITY BOLLARD PROCUREMENT SPECIFICATION

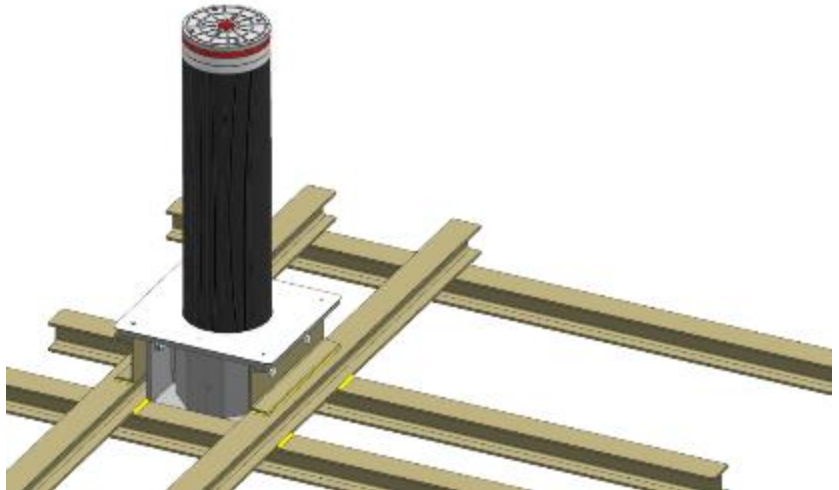

Static HIGH SECURITY BOLLARD FAAC JS 80 F is crash tested in accordance to:

- **PAS 68:** Impact test specifications for vehicle security barrier systems
- **IWA 14-1:** Vehicle Security Barriers - Part 1: Performance requirement, vehicle impact test method and performance rating
- **ASTM F2656:** Standard Test Method for Vehicle Crash Testing of Perimeter Barriers

**APPLICATIONS:**

Permanent delimitation of critical areas, like: military sites, airports, embassies, consulates, banks, marine zones, prisons, industrial sites or wherever is required a high level of perimeter protection.

**PRODUCT FEATURES:**

FAAC JS 80 F bollard has a steel cylinder 1000 mm / 40 inches high off ground, with diameter 275 mm / 11 inches.

The cylinder is protected from accidental collisions and from aggressive agents (i.e. oil spills, fossil fuels and other types of pollutants, etc.) by a replaceable jacket in mDure® polymer.

To prevent corrosion, the bollard is treated with a surface cataphoretic coating, all the internal fastenings are realized in stainless steel and the bollard's head is coated with special Rilsan® resin.

FAAC JS 80 F bollard has to be allocated into its dedicated underground support steel base. The underground support base sits within the reinforced concrete foundation realized according the supplied civil work drawings.

The riveted bars inside the cylinder allow and the correct positioning of the latter and the connection with the underground support base.

The cylinder is visible from all directions, thanks to the reflecting strip and the LED lights on the head (option).

**PERFORMANCE:**

FAAC JS 80 F bollard is certified as capable to arrest **in single unit configuration** vehicles of mass 7.500 kg / 16.535 pounds, driving at 80 kmh / 50 mph, corresponding to the following performance ratings:

PAS 68	PAS 68:2013 Fixed Bollard	V/7500 (N3)/80/90:6.0/20.8
IWA 14-1	IWA 14-1:2013 Fixed Bollard	V/7200[N3C]/80/90:6.3
ASTM F2656/F2656M	Test Method	F2656/F2656M C750-P2

The detected penetration rate is P2

**AVAILABLE VERSIONS:**

The cylinder aesthetic finishing can be:

- mDure® polymer protective sleeve; supplied in black colour with FAAC exclusive texture
- mDure® polymer protective sleeve; supplied with AISI 316L stainless steel cover

**INSTALLATION COMPLEMENTS:**

FAAC JS 80 F bollard has to be allocated into its dedicated underground support base, realized in cast iron and reinforced steel.



**TECHNICAL SPECIFICATIONS:**

Model	JS 80 R	JS 80 R INOX
Cylinder's height from ground	1.000 mm // 40 inches	1.000 mm // 40 inches
Cylinder's diameter including sleeve	275 mm // 11 inches	275 mm // 11 inches
Cylinder type	High performance steel	High performance steel
Cylinder treatment	Cataphoresis	Cataphoresis
Protective sleeve	mDure®	Aisi 316 + mDure®
Cylinder's head	Aluminium	Aluminium
Head treatment	Anti-corrosion Rilsan® resin	Anti-corrosion Rilsan® resin
Ground cover	AISI 316 stainless steel + mDure®	AISI 316 stainless steel + mDure®
Crash resistance	1.852.000 J	1.852.000 J
Cylinder weight	180 kg // 397 pounds	180 kg // 397 pounds
Cylinder packaging LxWxH	1.300 mm x 300 mm x 300 mm // 51 inches x 12 inches x 12 inches	1.300 mm x 300 mm x 300 mm // 51 inches x 12 inches x 12 inches

**UNDERGROUND SUPPORT BASE:**

Dimensions LxWxH	540 mm x 490 mm x 480 mm // 21 inches x 19 inches x 19 inches
Support base weight	100 kg // 220 pounds
Support base packaging LxWxH	

**FOUNDATION:**

Dimensions LxWxH (foundation to allocate 3 units)	4.000 mm x 2.300 mm x 400 mm // 157 inches x 91 inches x 16 inches*
Concrete Specifications:	Class C25/30 Concrete with 10-30 aggregate according to UNI EN 12620 standard Bollard shall be installed after at least 7 days of concrete setting; using a proper additive, it's possible to reduce to 3 days
Surrounding ground compacting index	≥ 90% of the Proctor optimum curve, according to UNI EN 13286-2:2005 standard

\* consider 10mm//0.4 inches above to lay the pavement + 10mm//0.4 inches below for the base of mud slab

