

FCI4400

Cellular Intercom



relay outputs

2

caller ID numbers

100

dial out numbers

4




- Calls your home phone and mobiles on roll-over when visitor presses the call button
- Open your gates from your phone
- Free home owner app to trigger gates, set up auto opening and closing times, create new access codes, receive notifications on entry, etc.
- Free installer app for remote programming and diagnostics
- Illuminated call button and keypad
- Included SIM card ready for activation
- 2 Relays
- 24V dc power adapter included


TECHNICAL SPECIFICATIONS

App Name	Cell Access
Power supply	24 Vdc
Power consumption	80mA standby - 300mA during call - 2A peak
Modem models	4G USA
Dial out numbers	4
Permanent codes	200
Time restricted codes	20
Temporary codes	30
Automatic trigger events per week	40
Caller ID numbers	100
Time restricted caller ID numbers	20
Relays	2
Relays type	N/C and N/O
Relay Load	2A - 24Vac max
Operating ambient temperature	-22°F - 110°F (-30°C - +50°C)
Weight	4.7 lb (2.1 kg)
Dimensions (L x D x H)	9 x 7 x 3 ½ in (229 x 178 x 89 mm)
Protection class	IP 55
Enclosure	BS316 marine grade SS construction with gloss black face trim

FEATURES

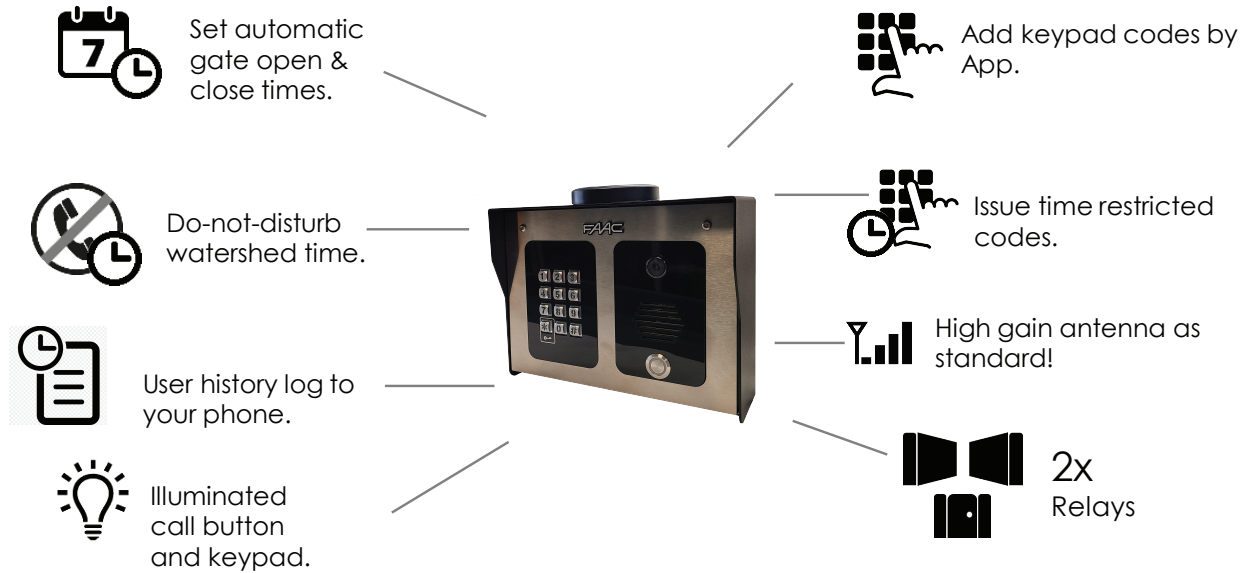

INSTALLER APP

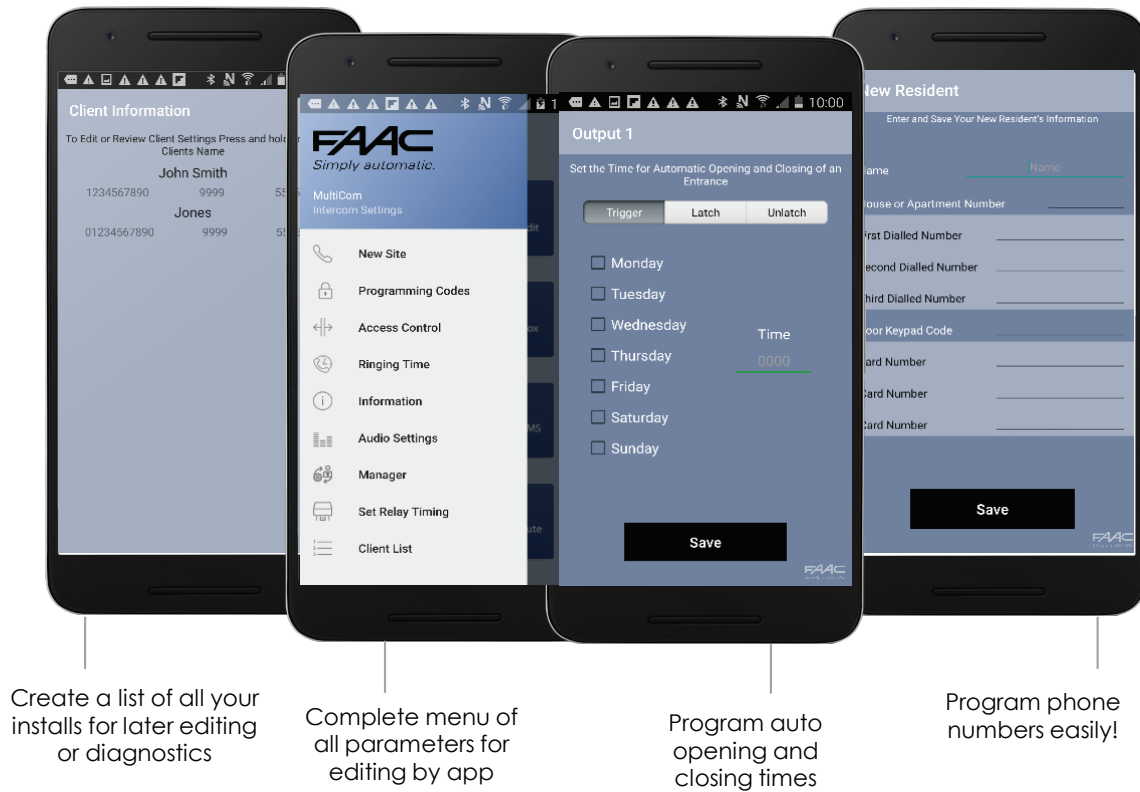

Home Owner /User App Screens




Allows to:

- Open / Close the gate
- Add Keypad codes
- Enable notifications
- Set Reset Auxiliary Outputs
- Program Do Not Disturb times
- and more...



DIMENSIONS

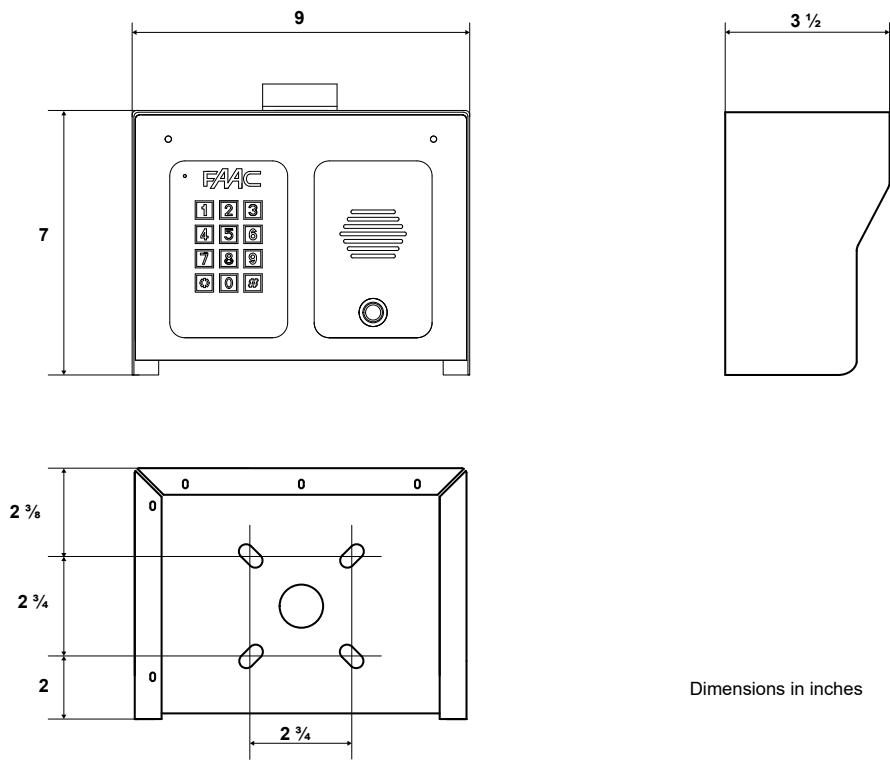

Dimensions in inches

MODELS

Model	Part No.
FCI4000 Cellular Intercom 4G	4400