

FCI4000

Cellular Intercom



dial out numbers

4

caller ID numbers

100



- Calls your home phone and mobiles on roll-over when visitor presses the call button
- Open your gates from your phone
- Free home owner app to trigger gates, set up auto opening and closing times, create new access codes, receive notifications on entry, etc.
- Free installer app for remote programming and diagnostics
- Illuminated call button and keypad
- Works with an AT&T (4G or 3G) or T-Mobile Micro SIM card
- 2 Relays
- 24V dc power adapter included
- Model with video capability available



TECHNICAL SPECIFICATIONS

Power supply	24 Vdc
Power consumption	80mA standby - 300mA during call - 2A peak
Modem models	3G or 4G USA
Dial out numbers	4
Permanent codes	200
Time restricted codes	20
Temporary codes	30
Automatic trigger events per week	40
Caller ID numbers	100
Time restricted caller ID numbers	20
Relays	2
Relays type	N/C and N/O
Relay Load	2A - 24Vac max
Operating ambient temperature	-22°F - 110°F (-30°C - +50°C)
Weight	4.7 lb (2.1 kg)
Dimensions (L x D x H)	9 x 7 x 3 ½ in (229 x 178 x 89 mm)
Protection class	IP 55
Enclosure	BS316 marine grade SS construction with gloss black face trim

FEATURES



INSTALLER APP

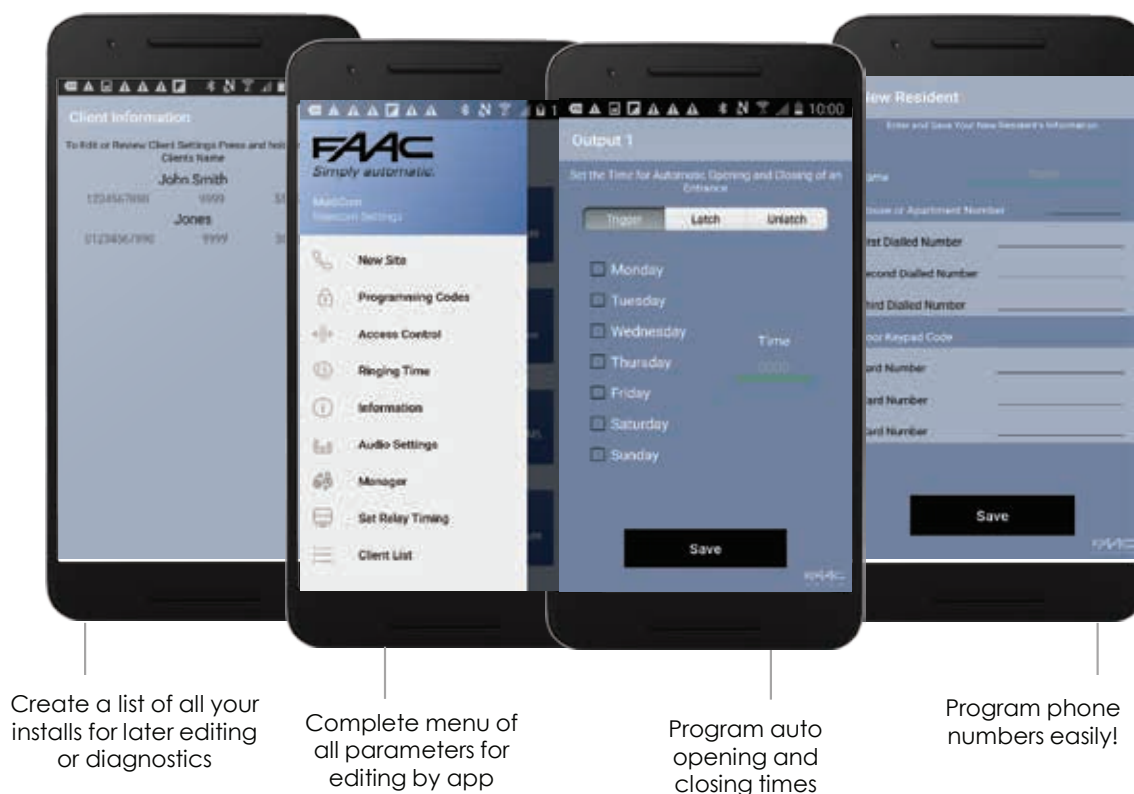

HOME OWNER / USER APP

Home Owner /User App Screens



Allows to:

- Open / Close the gate
- Add Keypad codes
- Enable notifications
- Set Reset Auxiliary Outputs
- Program Do Not Disturb times
- and more...




VIDEO OPTION

- Color camera, 110° view, 640x480 pixels
- Full streaming capability
- Infrared illumination for night vision
- Uplink bandwidth 110 kbits/sec
- 100 calls per ½ GB of data (based on 30 sec. calls)



DIMENSIONS

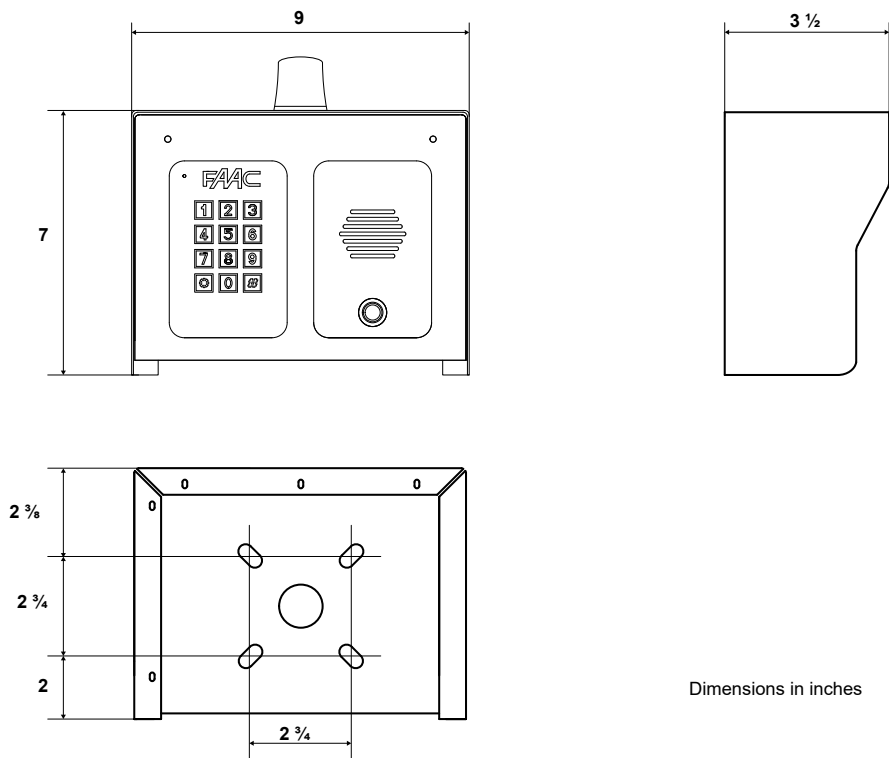

Dimensions in inches

MODELS

Model	Part No.
FCI4000 Cellular Intercom 3G	4300
FCI4000 Cellular Intercom 4G	4400
FCI4000 Cellular Intercom 4G with video	4401